

The logo for JCC, consisting of the letters 'JCC' in a bold, italicized, sans-serif font. The letters are white with a slight gradient and shadow effect, giving them a three-dimensional appearance. The background is a dark purple gradient with a pattern of glowing white and light purple circles of varying sizes, some of which are blurred to create a bokeh effect.

Lighting for **today**, designs for **tomorrow**

Commercial

www.jcc-lighting.co.uk

Product	Page
<i>Breera Recessed LED Flat Panel</i>	46
<i>Breera Suspended LED Flat Panel</i>	48
<i>Auzon LED High Bay</i>	49

03

Breera LED Recessed Flat Panel

Family of high performance recessed LED flat panels
 300 x 300, 600 x 600 and 300 x 1200 versions available
 40,000 hours average life
 Integral driver
 High output suitable for commercial applications
 Ideal for corridors, office and ancillary areas
 Photometry data available on the JCC website
 Supplied with support wire anchorage eyelets
 Recommended for horizontal installations

 JC71198



46

LED available in:



Finishes

Aluminium



Classification

  240V 50Hz

Construction

Body: Extruded aluminium trim, with opal diffuser

Nearest Equivalent

JC71198 = 3 x 14W T5 Fluorescent

JC71199 = 3 x 14W T5 Fluorescent

Code:	Description:	Total Wattage:
JC71197	LED Panel 300 x 300	11W
JC71198	LED Panel 600 x 600	28W
JC71199	LED Panel 300 x 1200	45W



Lighting for today, designs for tomorrow


Tel: 01243 838999
 Fax: 01243 838998

www.jcc-lighting.co.uk
 email: sales@jcc-lighting.co.uk




Breera LED Recessed Flat Panel


▼ JC71197

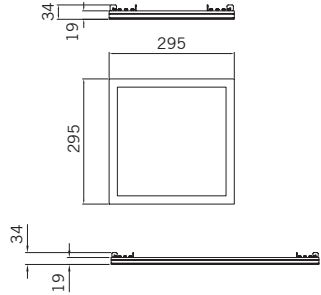

▼ JC71198

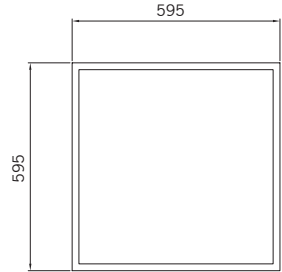

▼ JC71199

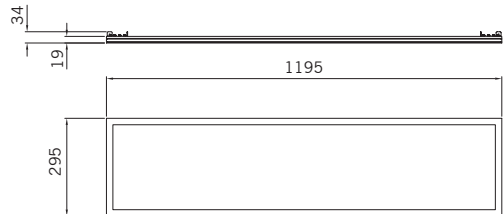


Breera LED Linear Suspended Flat Panel

Suspended 300 x 1200 LED flat panel
25,000 hours average life
Integral driver
High output suitable for commercial applications
Ideal for corridors, office and ancillary areas
Dimmable
Complete with wireless remote dimmer control

JC71259

48

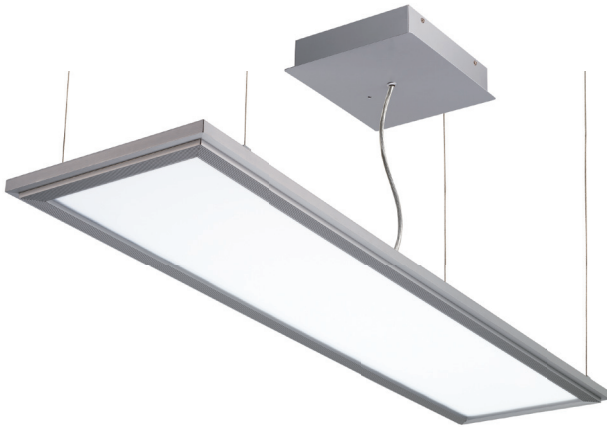

LED available in:



Finishes

Silver




Classification

IP20 240V

Construction

Body: Mild steel
Frame: Extruded aluminium trim, with opal diffuser

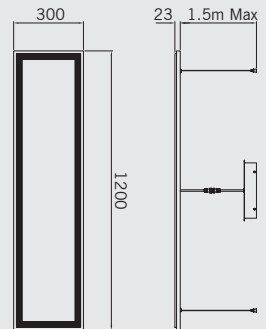

Wireless remote dimmer control

Code:	Description:	Total Wattage:
-------	--------------	----------------

JC71259	LED linear suspended flat panel	56W
---------	---------------------------------	-----

Auzon LED High Bay

LED available in:



Finishes

Silver




Classification

240V 50Hz

Construction

Body: Die-cast aluminium



80W high output LED high bay pendant downlight
 86° flood beam angle
 Crisp white light
 Ideal for lighting warehousing, retail and showroom spaces
 Photometry data available on the JCC website

JC54017



Nearest Equivalent

JC54017 = 2 x 42W Compact Fluorescent
 = 1 x 70W Metal Halide

Code:	Description:	Total Wattage:
JC54017	LED High Bay	80W



Tel: 01243 838999 | www.jcc-lighting.co.uk
 Fax: 01243 838998 | email: sales@jcc-lighting.co.uk



Lighting for today, designs for tomorrow